



AMI Sola Pure Ultraviolet + Ultrafiltration Complete Home Water Treatment & Disinfection System



- INACTIVATES THEN REMOVES VIRUS, BACTERIA & PROTOZOA FROM DRINKING WATER
- REMOVES CHLORINE, CHEMICALS, BAD TASTES, ODORS & SEDIMENT
- ZERO WASTE WATER

AMI Sola Pure Ultraviolet and Ultrafiltration Water Treatment System is a unique complete water treatment solution combining Ultraviolet Water Disinfection with Carbon Filtration, Sediment Filtration, and Ultrafiltration stages. This one-of-a-kind system addresses both microbiological and aesthetic issues with zero water wasted and no drain line or tank to install.

5 STAGES OF POWERFUL FILTRATION

- **Stage 1: 5 Micron Sediment Filter** Removes Dirt, Rust, Sand, Dust, Silt, and other physical impurities from water down to 5 microns.
- **Stage 2: Carbon Filter for Powerful Chemical Adsorption & Flavor Enhancement** Absorbs Chlorine, Unpleasant Tastes and Odors, Chloramine, and VOCs, Other Chemical Contaminants, and Corrects Turbidity (cloudiness).
- **Stage 3: Ultraviolet Disinfection** destroys 99.99% of waterborne pathogens (including virus, bacteria, and protozoa) in the water.
- **Stage 4: Ultrafiltration Membrane** removes the inactivated microorganisms and other contaminants down to 0.02 microns while allowing essential minerals to pass into the product water.
- **Stage 5: Carbon Post Filter** polishes the flavor of the water as it is dispensed from the faucet.



2 CONNECTION POINTS: IN & OUT

The Easiest Water Treatment to install: Since there is zero water wasted, there is no drain line to install. The product water tank is pre-plumbed inside of the space-saving enclosure.



APPLIED MEMBRANES INC.®

Industry Leader in RO Expertise and Membrane Applications Since 1983™

www.appliedmembranes.com • sales@appliedmembranes.com • (760) 727-3711 • Vista, CA, USA





POINT OF USE DRINKING WATER TREATMENT

AMI Sola Pure UV + UF Water Disinfection & Filtration

AMI SOLA PURE UV + UF WATER TREATMENT SYSTEM

Part #	HD-35SP
Model:	AMI Sola Pure
Tank:	Pre-Plumbed Internal Tank
Removes:	Sediment, Chlorine & Chemicals Bad Tastes & Odors 99.99% of bacteria, virus, protozoa
Stages:	5
System Dimensions:	16.5" x 17.5" x 9.6"
Line & Connections:	3/8" IN & 1/4" OUT Quick Connect
Shipping Weight & Dims:	21"x21"x13" @ 27lbs



SYSTEM FEATURES

- Ultraviolet Disinfection with Smart UV Controller
- Ultrafiltration Membrane Removes Harmful Contaminants while Allowing Natural Minerals Through to the Product
- Sediment & Carbon Prefilters, Carbon Polishing Filter
- Designer Long-Reach Faucet
- Attractive and Space-Saving Enclosure
- Pre-Plumbed Internal Storage Tank
- Wall-Mountable Bracket with Mounting Equipment
- Automatic Operation
- Quick-Connect Inlets & Outlets
- Complete Installation Kit Including Feed Adapter

CHEMICAL-FREE, WORRY-FREE DISINFECTION

Destroys 99.99% of illness-causing pathogens in water.

Bacteria



*Including
E. coli,
Salmonella,
Legionella

Viruses



*Including
Hepatitis A,
Rotavirus,
Adenovirus

Protozoa



*Including
Cryptosporidium,
Giardia
*Refer to UV Dose Chart

Smart UV Controller



Lamp Dims When Not in Use

Saves Electricity & Extends Lamp Life

No "Hot Water Blast"

Systems that stay on 24/7 make the water very hot. AMI on-demand disinfection keeps water cool & safe.

ZERO Waste Water

Easy To Install

Install with just
Two Quick Connections
1. Raw Water In
2. Purified Water Out

Connect From
Cold Water Line



Connect to Faucet

⊘ No Drain Line

✓ Pre-plumbed tank

⚡ Easy QC Fittings



**Includes Installation Kit
& Designer Faucet**

APPLIED MEMBRANES INC.®

Industry Leader in RO Expertise and Membrane Applications Since 1983™

www.appliedmembranes.com • sales@appliedmembranes.com • (760) 727-3711 • Vista, CA, USA





POINT OF USE DRINKING WATER TREATMENT

AMI Sola Pure UV + UF Water Disinfection & Filtration

REPLACEMENT FILTERS AND MEMBRANES

Replacement Kit Part #: RFK-HD-35SP-YEAR

1 Year Supply - includes one complete set of filters, membranes & UV lamp needed for the yearly service, plus an additional set of pre-filters which are recommended to be changed every 6 months.

Stage	Description	Qty. in Kit	Individual Filter Part Number
1	5 Micron Sediment	2	H-F0833-43QC
2	Carbon Block Filter	2	H-F0832-43QC
3	UV Lamp	1	UV-L11W
4	UF Membrane	1	M-U1808-ENK
5	Polishing Filter	1	H-F0834-43ST

COCONUT SHELL CARBON

AMI Carbon filters are made with 100% carbon produced from coconut shells, a renewable and sustainable resource, offering superior chemical absorption compared to coal-based carbon filters.




BACKED BY AMI EXPERTISE & SUPPORT



AMI Home RO & UF Systems are designed by the largest USA membrane manufacturer, Est. 1983. AMI Home RO systems use the same proven technology trusted by major corporations world-wide, now available in your home.



1 Year Supply of Replacements For AMI Sola Pure Water Treatment System

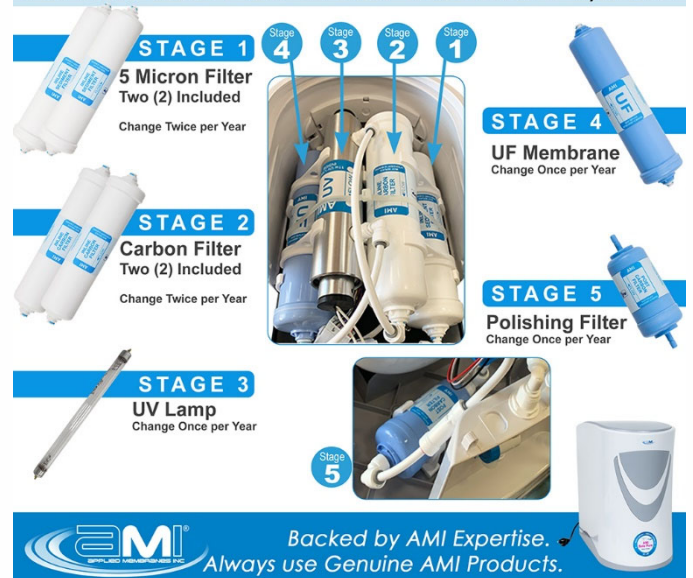

APPLIED MEMBRANES INC.®

Industry Leader in RO Expertise and Membrane Applications Since 1983™

www.appliedmembranes.com • sales@appliedmembranes.com • (760) 727-3711 • Vista, CA, USA

