



Premier Water Testing Instruments

HOW PURE IS YOUR WATER?®




DM-1: IN-LINE DUAL TDS METER

HM Digital DM-1 Dual In-Line TDS Tester measures the tap water coming in vs. the purified water going out of your system at any time. Use the TDS meter to determine when filters need to be changed. Install the meter for your customers so they'll always know how their system is performing.

FEATURES

- Displays TDS levels of the feed water and product water with in & out electrode probes.
- Highly efficient and accurate due to its advanced microprocessor technology.
- Auto-Off function conserves battery power. The unit shuts off automatically after 10 minutes of non-use.
- Dual Range 0-9990 ppm (From 0 - 999 ppm the resolution is 1 ppm. From 1000 to 9990 ppm, the resolution is 10 ppm, indicated by a blinking 'x10' image.)
- Factory Calibrated: our meters are calibrated with a 342 ppm NaCl solution. Meters can be recalibrated with a mini-screwdriver.
- Installs quickly and easily.

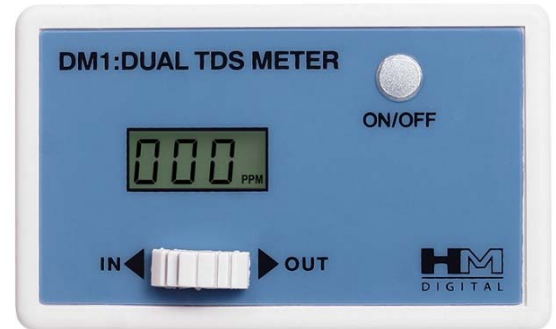

SPECIFICATIONS

Range: 0-9990 ppm
Accuracy: ±2%
Conversion Factor: NaCl (avg. 0.5)
Cable Length: 24.5" (including sensor)
Fittings: 1/4" standard, also available with 3/8" or 1/2"
Power source: 2 x 1.5V button cell batteries (LR44 or equivalent; included)
Battery life: approx. 1000 hours of continuous use
Size: 7.6 x 2 x 4.7 cm (3 x .8 x 1.9 in.)
Weight: 79.4 g (2.8 oz.)

Requires tee fitting (sold separately) with 1/4" QC Connection for installation.

1 YEAR WARRANTY



Distributed By:



2450 Business Park Drive, Vista, CA 92081, USA
 (760) 727-3711 • FAX: (760) 727-4427
 Internet: www.appliedmembranes.com
 E-mail: sales@appliedmembranes.com

