


# AMI™ MEMBRANES

## NF5 NANOFILTRATION ELEMENTS

### PERFORMANCE SPECIFICATIONS

Model No.	Permeate Flow Rate		Average Salt Rejection %	Average Hardness Rejection %
	Gals/Day	Liters/Day		
M-N2514A5	175	662	50	97+
M-N2521A5	250	668	50	97+
M-N2540A5	600	1602	50	97+
M-N4014A5	450	1203	50	97+
M-N4021A5	800	3028	50	97+
M-N4040A5	2000	7570	50	97+

Note: Performance specifications based on, 2000 mg/l magnesium sulfate, 150 psi (1.6 MPa) applied pressure, 77°F (25°C) feed water temperature and 15% recovery. Element permeate flow may vary ± 15%

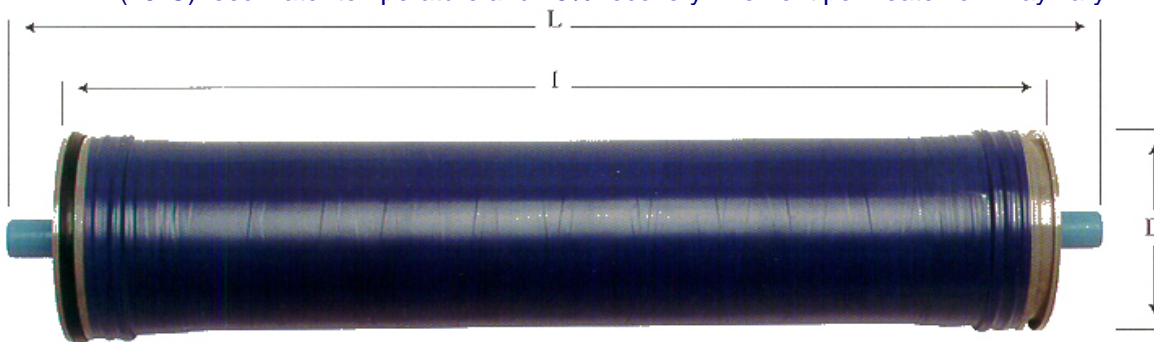

### RECOMMENDED OPERATING CONDITIONS

Maximum applied pressure	300 psi
Maximum feed flow rate	17 gpm
Maximum operating temperature	113°F (45°C)
Maximum feed water turbidity	1 NTU
Maximum feed water silt density index (15 min)	4
Single Element recovery, %	15

### DIMENSIONS

Model No.	L		l		D	
	Inches	CM	Inches	CM	Inches	CM
M-N4014A5	14	35.6	12	30	3.9	9.9
M-N4021A5	21	53.3	19	48	3.9	9.9
M-N4040A5	40	101.6	38	96	3.9	9.9
M-N2521A5	21	53.3	19	48	2.4	6.1
M-N2540A5	40	101.6	38	96	2.4	6.1

Applied Membranes, Inc. assumes no liability for results obtained or damages incurred through the improper application of the above information and data.

**APPLIED**  
**MEMBRANES INC.**

2325 Cousteau Ct., Vista, CA 92081 • (760) 727-3711 • FAX (760) 727-4427

Sales@appliedmembranes.com • www.appliedmembranes.com

APPLIED MEMBRANES INC., AMI™, APPLIED™  
are trademarks of APPLIED MEMBRANES, INC.

© 2006 Applied Membranes, Inc.

## Important Operating Information

1. Elements must be kept sealed and moist when in storage. Drying out will irreversibly damage the membranes.
2. Prevent elements from freezing, or being exposed to direct sunlight.
3. Elements are shipped in sealed bags and contain a preservative solution of 1-2% (by weight) of sodium meta bisulfite (Food Grade).
4. Discard the permeate from the first hour of operation.
5. Permeate flow varies with feed water temperature. Divide the rated flow with the correction factor below to get the permeate flow at that temperature.

Temperature		Correction Factor
°C	°F	
5	41.0	2.58
6	42.8	2.38
7	44.6	2.22
8	46.4	2.11
9	48.2	2.00
10	50.0	1.89
11	51.8	1.78
12	53.6	1.68
13	55.4	1.61
14	57.2	1.54
15	59.0	1.47
16	60.8	1.39
17	62.6	1.34
18	64.4	1.29
19	66.2	1.24
20	68.0	1.19
21	69.8	1.15
22	71.6	1.11
23	73.4	1.08
24	75.2	1.04
25	77.0	1.00
26	78.8	0.97
27	80.6	0.94
28	82.4	0.91
29	84.2	0.88
30	86	0.85

6. Membrane Elements for residential systems have a one year warranty from the date of shipment. Warranty is void for membrane elements fouled by suspended solids, precipitates or biological growth. Membrane warranty is also void if the membrane elements are improperly used, poorly maintained or improperly stored.
7. Applied Membranes' obligation under this warranty is limited to and shall be fully discharged by repairing or replacing any defective part FOB its works. Applied Membranes shall not be liable for damages or delay caused by defective material. Please refer to detailed warranty information.
8. Warranty claims for membrane elements must be made as detailed in Membrane Warranty Claims Bulletin.