



CBC SERIES CARBON-BRIQUETTE CARTRIDGES

Reduces taste/odor/chlorine and certain VOC's from drinking water
Effective at filtering Cryptosporidium and Giardia cysts
High capacity chlorine reduction
Nominal 0.5-micron rating

CBC Series cartridges are highly effective at reducing unwanted taste, odor, chlorine, certain VOC's and pesticides from potable drinking water. With a nominal 0.5 micron rating, they are equally effective at reducing Cryptosporidium and Giardia cysts, as well as fine sediment.

CBC Series cartridges are manufactured using a patented process* and made entirely from FDA-approved materials. They are an ideal choice for a wide range of residential, food service, commercial and industrial applications. They also make excellent polishing filters or pre-filters in applications requiring fine filtration and high capacity.

Distributed By:

**APPLIED
MEMBRANES INC.®**

2325 Cousteau Ct., Vista, CA 92081 · (760) 727-3711 · FAX (760) 727-4427
<http://www.appliedmembranes.com> · sales@appliedmembranes.com

USFilter
Plymouth Products


CBC SERIES

Carbon-Briquette Cartridges



COMPONENT

The CBC-10, CBC-20, CBC-BB and CBC-20BB are Tested and Certified by NSF International under ANSI/NSF Standard 42 for material requirements only.

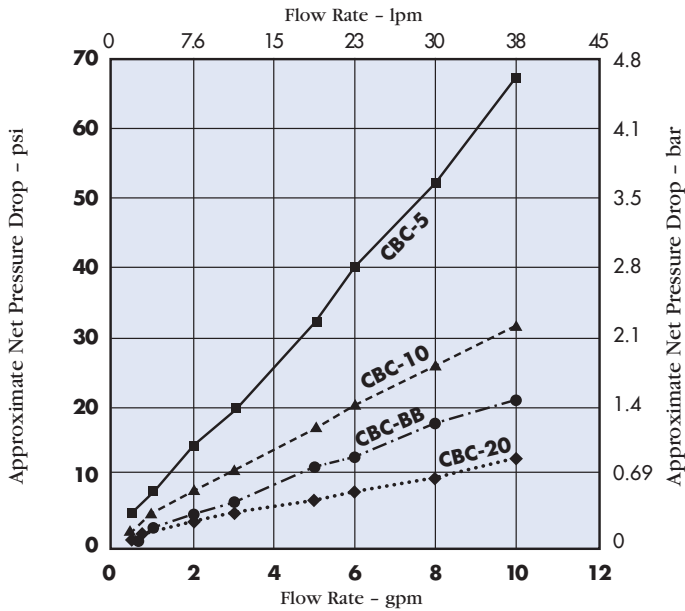

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating (Nominal)	Initial ΔP (psi) @ Flow Rate (gpm)	Chlorine Reduction @ Flow Rate (gpm)
CBC-5	2-7/8" x 4-7/8" (73mm x 124mm)	0.5	7.0 psi @ 1 gpm (0.48 bar @ 3.8 lpm)	>3,000 gallons @ 1 gpm >11,400 liters @ 3.8 lpm
CBC-10	2-7/8" x 9-3/4" (73mm x 248mm)	0.5	3.7 psi @ 1 gpm (0.26 bar @ 3.8 lpm)	>20,000 gallons @ 1 gpm >75,700 liters @ 3.8 lpm
CBC-20	2-7/8" x 20" (73mm x 508mm)	0.5	3.0 psi @ 2 gpm (0.21 bar @ 7.6 lpm)	>45,000 gallons @ 2 gpm >170,300 liters @ 7.6 lpm
CBC-BB	4-5/8" x 9-3/4" (117mm x 248mm)	0.5	4.6 psi @ 2 gpm (0.32 bar @ 7.6 lpm)	>50,000 gallons @ 2 gpm >189,300 liters @ 7.6 lpm
CBC-20BB	4-5/8" x 20" (117mm x 508mm)	0.5	8.5 psi @ 4 gpm (0.59 bar @ 15.1 lpm)	>150,000 gallons @ 4 gpm >567,800 liters @ 15.1 lpm

Materials of Construction

- **Filter Media** Bonded PAC
- **End Caps** Polypropylene
- **Inner/Outer Wraps** Polypropylene
- **Netting** Polyethylene
- **Gaskets** Buna-N
- **Temperature Rating** 40° F to 180° F (5° C to 83° C)

NOTE: Performance capacity depends on system design, flow rate and certain other application conditions. Certain states require system registration or certification for health-related contaminant reduction claims.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

NOTE: Cartridges will contain a very small amount of carbon fines (very fine black powder) and a new cartridge after installation should be flushed with sufficient water to remove all traces of the fines from your water system before using the water. Each time you use your filtered water tap for drinking or cooking purposes it is recommended that you run (flush) the tap for at least 20 seconds prior to using water.

NOTE: The recommended maximum water temperature for VOC and Pesticide reduction is 85° F.

NOTE: Micron ratings based on 85% or greater removal of given particle size. Data obtained from actual particle counts using AC Fine Test Dust and Latex spheres. CBC-Series cartridges are capable of reducing 99.9% of Cryptosporidium and Giardia cysts.

*Estimated capacity using 2ppm free available chlorine (FAC) at continuous flow with greater than 90% reduction.

* U.S. Patent No. 5,976,432

Distributed By:

APPLIED MEMBRANES INC.[®]

2325 Cousteau Ct., Vista, CA 92081 · (760) 727-3711 · FAX (760) 727-4427
<http://www.appliedmembranes.com> · sales@appliedmembranes.com

