


RESISTIVITY SENSOR #CS10

For 750II Resistivity Monitor/controllers

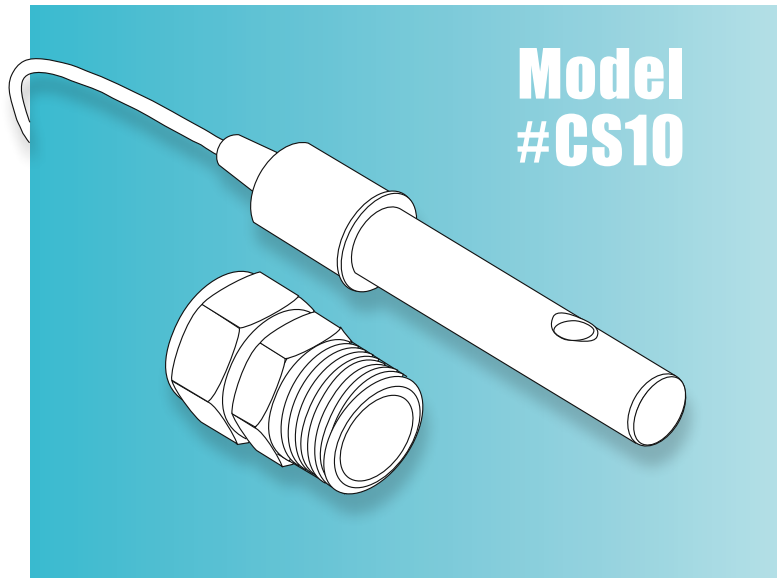

Model #CS10

- *Small size enables convenient installation and service.*
- *Dual O-ring seals used on all versions for high on-stream reliability.*
- *Plastic gland fitting allows removal and replacement without tools.*

MODELS: CS10 and CS10LS

BENEFITS

- *Economic Value*
- *Small, Convenient Size*
- *100 psi at 100°C*
- *General Purpose Use*
- *Field Replaceable*

DESCRIPTION

Wetted materials of construction are 316 stainless steel and Teflon®, with double O-ring seals at all points. The first EPR O-ring bears the brunt of process interface, allowing the second O-ring to maintain

reliable sealing, free from chemical attack. An integral temperature element allows automatic compensation for maximum accuracy. Leads are 10 ft./3 meters standard.

Process connections are made via a bored through swage 3/4" NPT fitting as standard. This fitting may be installed into a line or tank, or may be reversed and connected to a standpipe for use in a submersion configuration.

The CS10 was designed primarily for use in pure water applications.



Assembled Resistivity Sensor

* Teflon® is a registered trademark of DuPont.

**MYRON L
COMPANY**
Water Quality Instrumentation
Accuracy • Reliability • Simplicity

Distributed By:

**APPLIED
MEMBRANES INC.®**

Industry Leader in RO Expertise and Membrane Applications since 1983™

2450 Business Park Dr., Vista, CA 92081 ☎ (760) 727-3711 📠 (760) 727-4427
🌐 www.appliedmembranes.com ✉ sales@appliedmembranes.com

SPECIFICATIONS

Maximum Pressure/ Temperature Ratings 100 psi/6,9 bar at 100°C/212°F
200 psi/13,8 bar at 120°C/248°F with 316SS Fitting

Wetted Materials:


Insulator Teflon®
O-rings EPR
Electrodes 316 Stainless Steel standard, optional materials available upon request.
Fitting Polypropylene, 316SS, or PVDF

Temperature Compensation 5.49 KΩ & 100 KΩ @ 25°C/77°F
RT100 & RT1000 available upon request.

Connections: 1/2" and 3/4" NPT compatible with BSP
Polypropylene Process Fitting 3/4" NPT Standard
Options 1/2" NPT Stainless Steel
1/2" NPT PVDF
Electrical Plain tinned wire ends, 22-24 gauge.

Sensor Constant:

Model	Range	Constant
CS10	0-200 KΩ to 0-20 MΩ	0.05
CS10LS	0-200 KΩ to 0-20 MΩ	0.05

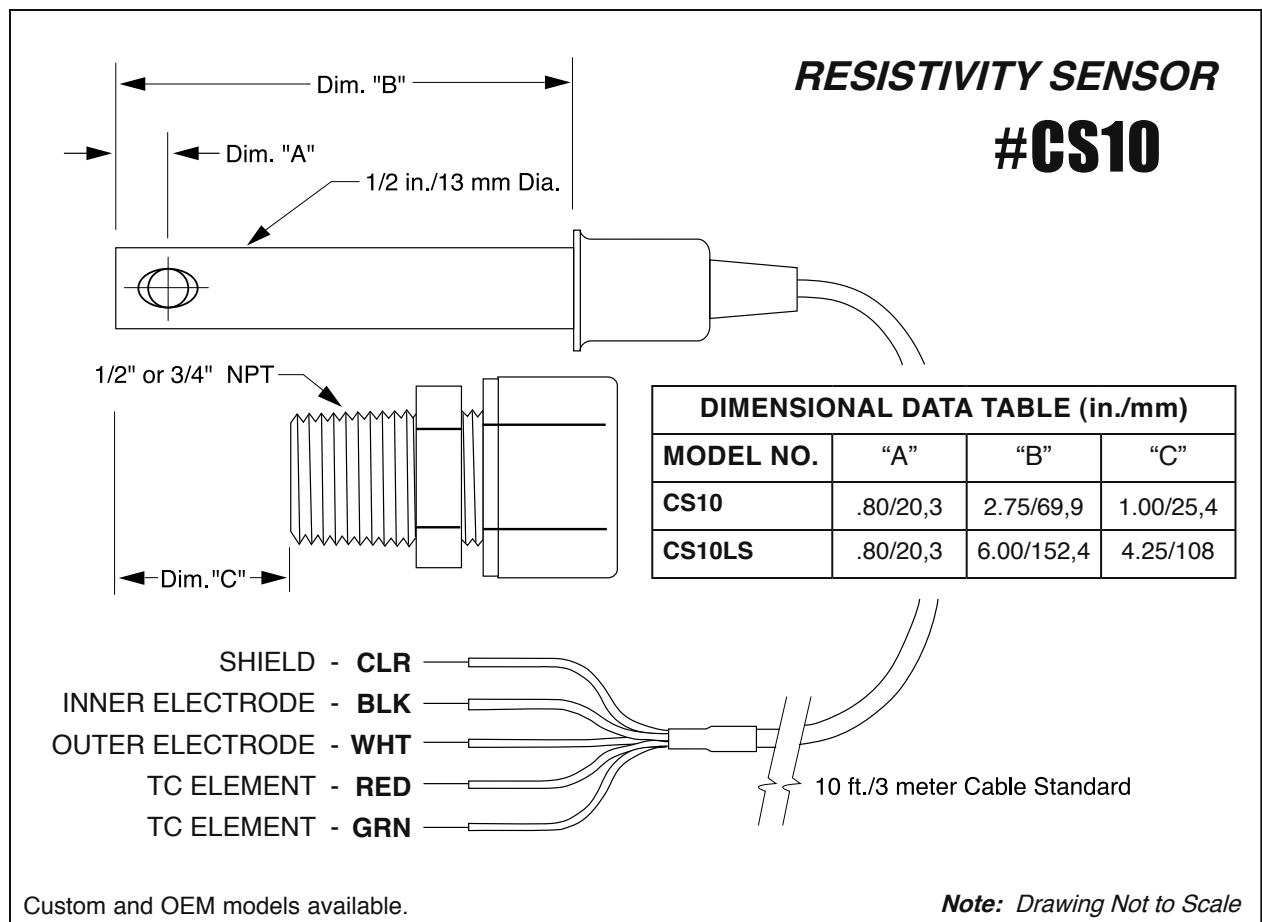

LIMITED WARRANTY

All Myron L resistivity sensors have a Two (2) Year Limited Warranty. If sensor fails to function normally, return the unit to the factory prepaid. If, in the opinion of the factory, failure was due to materials or workmanship, repair or replacement will be made without charge. A reasonable service charge will be made for diagnosis or repairs due to normal wear, abuse or tampering. Warranty is limited to the repair or replacement of the sensor only. The Myron L Company assumes no other responsibility or liability.

Distributed By:

**APPLIED
MEMBRANES INC.®**

Industry Leader in RO Expertise and Membrane Applications since 1983™

2450 Business Park Dr., Vista, CA 92081 ☎ (760) 727-3711 📠 (760) 727-4427
🌐 www.appliedmembranes.com ✉ sales@appliedmembranes.com



© Myron L Company 2008

CS10DS 03-08