


TECHPRO II™ TH1

Measuring pH and Temperature

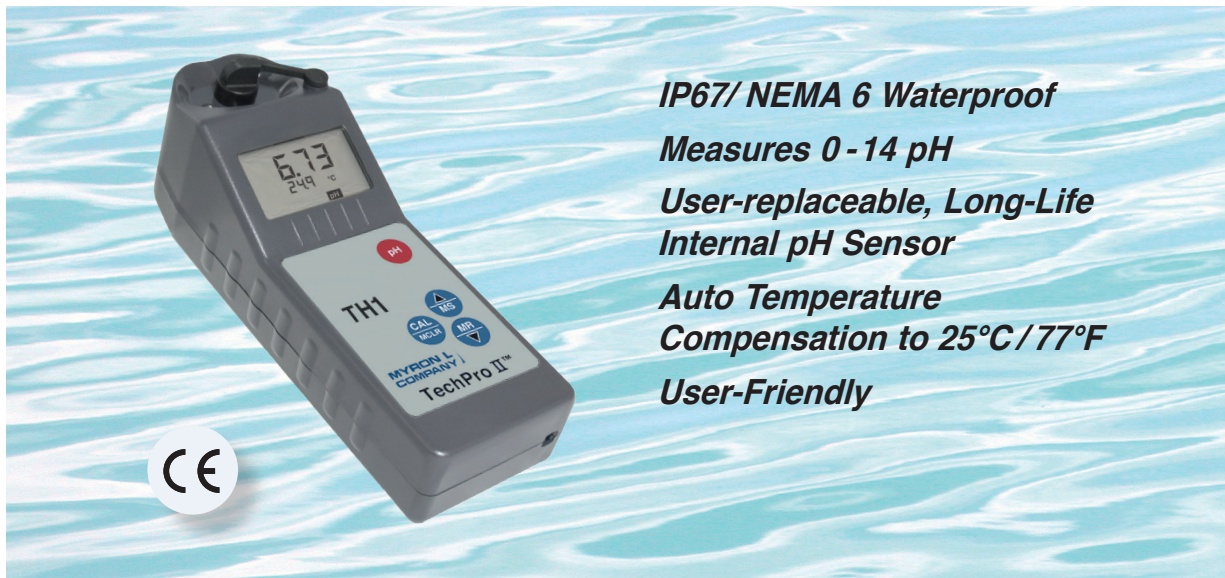

IP67/ NEMA 6 Waterproof

Measures 0 - 14 pH

**User-replaceable, Long-Life
Internal pH Sensor**

**Auto Temperature
Compensation to 25°C / 77°F**

User-Friendly

BENEFITS:

- **Saves Time**
- **Saves Money**
- **Ensures Product Quality**

FEATURES:

- **Memory storage (20 readings)**
- **Prompts for simple pH calibration**
- **Internal Sensor to prevent breakage**
- **Auto shut-off for longer battery life**
- **Lightweight and fits in the palm of your hand**
- **Waterproof case**

APPLICATIONS:

- **Water/Wastewater Treatment**
- **Boilers & Cooling Towers**
- **Reverse Osmosis**
- **Aquaculture**
- **Paper & Printing Industry**
- **Swimming Pools & Spas**
- **Plating and Parts Washing**
- **Agriculture**
- **Process Control**
- **Food & Beverage**

ACCURATE READINGS IN 2 EASY STEPS



1

Rinse and fill cell cup



2

**Push button to display
reading**

Ideal for water treatment testing as well as other industrial and commercial applications, the TH1 reflects Myron L's 40-plus years experience designing and manufacturing water quality instrumentation.

PORTABLE & EASY TO USE

The TechPro II TH1 is handheld, lightweight and simple to operate. Measuring pH and temperature, the highly stable circuitry delivers the accurate readings necessary to assure product quality, prevent equipment damage or verify in-line instrumentation in a wide range of applications. This model is designed with an internal sensor to prevent breakage and prolong the sensor's useful life. The rugged, waterproof case protects the electronics of the instrument and fits comfortably in your hand. This model also features auto shut-off to prolong battery life.

Industrial and commercial users all over the world rely on Myron L's proven quality instruments for their water measurement needs.

To find out more about TechPro II TH1 or locate the distributor nearest you, visit: www.myronl.com

MEASUREMENTS YOU CAN COUNT ON

Obtain reliable and accurate measurements of your water source with the value-priced TechPro II.

**MYRON L
COMPANY**
Water Quality Instrumentation
Accuracy • Reliability • Simplicity

Distributed by Applied Membranes, Inc. www.appliedmembranes.com

SPECIFICATIONS

Display	4 Digit Liquid Crystal Display
Dimensions	196 x 68 x 64 mm/ 7.7 x 2.7 x 2.5 in.
Weight	320 g/11.2 oz.
Case/Cell Material	ABS
pH Sensor Well Capacity	1,2 ml/0.04 oz.
Power	9V alkaline battery
Battery Life	>100 hours (5000 readings)


Operating/Storage Temperature	0 – 55°C/32 – 132°F
Protection Ratings	IP67/NEMA 6 (Waterproof to 1 meter/3 ft.)
pH Range	0 – 14 pH
Temperature Range	0 – 71°C/32 – 160°F Compensated to 25°C/77°F
Accuracy:	
pH	± 0.01 pH
Temperature Reading	± 0.1°C/F



The TechPro II Line of Accessories: pH Buffers, Storage Solution, Replacement pH Sensor, & choice of Soft or Hard Protective Carry Case



The pH sensor chamber protects a large-capacity, long-life KCl reservoir.

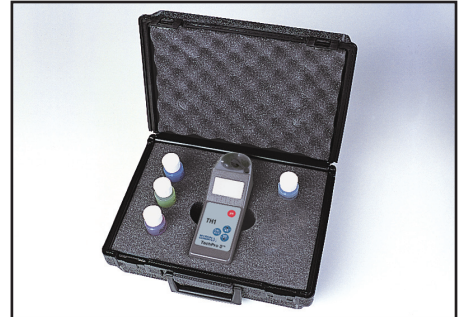

The foam-lined case, model PKP, provides extra protection and portability, making it easier to carry your TechPro II instrument in the field.

ACCESSORIES

Porta-Kit

This hard protective carry case is a rugged, all plastic foam-lined case that includes 2 oz. each pH 4, 7 & 10 Buffers and pH Sensor Storage Solution.

Model: PKP

Hard Protective Case

Small foam-lined protective carry case.

Model: UPP

Soft Protective Case

Constructed of padded nylon and features a belt clip for hands-free mobility.

Model: UCC (Blue),
UCCDT (Desert Tan)

Replacement pH Sensor:

Non-refillable KCl gel-filled combination pH sensor featuring a chemical resistant, porous liquid junction.

Model: RPG

NIST Standard Solutions and pH Buffers:

All Myron L Instruments are factory calibrated with Standard Solutions of known pH Buffer values 4, 7 and 10. These buffers are traceable to the U.S. Government's National Institute of Standards and Technology primary solutions. Periodic recalibration with the appropriate pH Buffers will help maintain the accuracy of your instrument.

pH Buffer Solutions

PH4 pH 4 (red)
PH7 pH 7 (yellow)
PH10 pH 10 (blue)
SS pH Sensor Storage Solution

Example: To order 1 qt./1L of pH 4, order # PH4Q.

NIST Certification:

Certificates are available that confirm NIST traceability of an instrument (Order #MC) or pH Buffer (Order #SC).

Note: Both MC instrument certificates and/or SC pH Buffer Solution certificates must be specified when placing instrument/solution orders.

LIMITED WARRANTY

All Myron L TechPro II TH1 Instruments have a Two (2) Year Limited Warranty, excluding the pH sensors, which have a Six (6) Month Limited Warranty. Warranty is limited to the repair or replacement of the TechPro II TH1 Instrument only, at our discretion. The Myron L Company assumes no other responsibility or liability.

Distributed By:

**APPLIED
MEMBRANES INC.®**

Industry Leader in RO Expertise and Membrane Applications since 1983™

2450 Business Park Dr., Vista, CA 92081 ☎ (760) 727-3711 📠 (760) 727-4427

🌐 www.appliedmembranes.com ✉ sales@appliedmembranes.com



© Myron L Company 2008

TPH1DS 01-08